




## **Technical Specifications**

	HFT 300
Nominal voltage (V)	12
Current consumption at 12 V (A)	7.1
Air flow rate	175 cfm (300 m³/h)
Air filtration level	H14
MPPS efficiency	99.995%
Sound level (dB)	≈70
Dimensions O.D.x L	8 in x 24 in (200 mm x 600 mm)
Weight	6.8 lbs (3.1 kg)
Temperature range	-4 °F to +140 °F (-20 °C to +60 °C)

## Key benefits at a glance:

- Removes 99.995% of airborne infections and contaminants
- HEPA H14 classified filter
- High air exchange rate
- Up to 350 ft³ (10 m³) fresh air every minute
- Ultra compact and lightweight
- Hasslefree installation

- Contamination free exchange of H14 filters
- Available version: 175 cfm (300 m³/h)
- Automatic filter monitoring feature
- Compliant with European Medical Device Directive CE 47/2007
- Meets WHO / CDC / ECDC / IATA air filtration guidelines

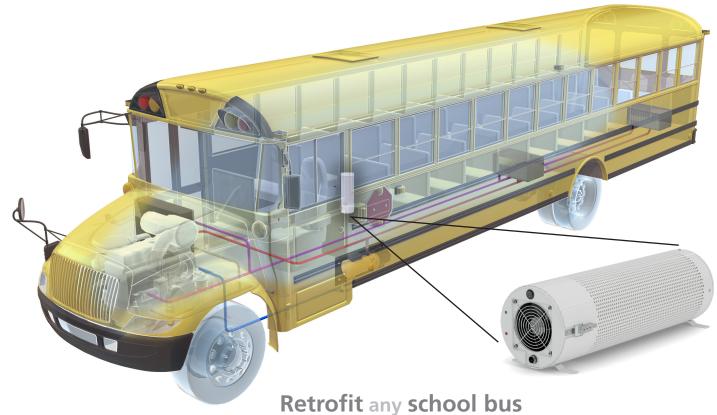

with a medical grade air filtration system



Rochester | Chittenango | Albany | North Branford, CT

888-26-PARTS www.newyorkbussales.com